

# THE SONIC VT



Tank Dryer

The Sonic VT Tank Dryer with our patented heaterless hot air technology is a powerful yet compact system which reduces post clean-in-place process drying times. Clean dry air from the Sonic Blower handles tanks, blenders, totes and piping up to 500 cubic feet.

## Innovation

experience

versatility

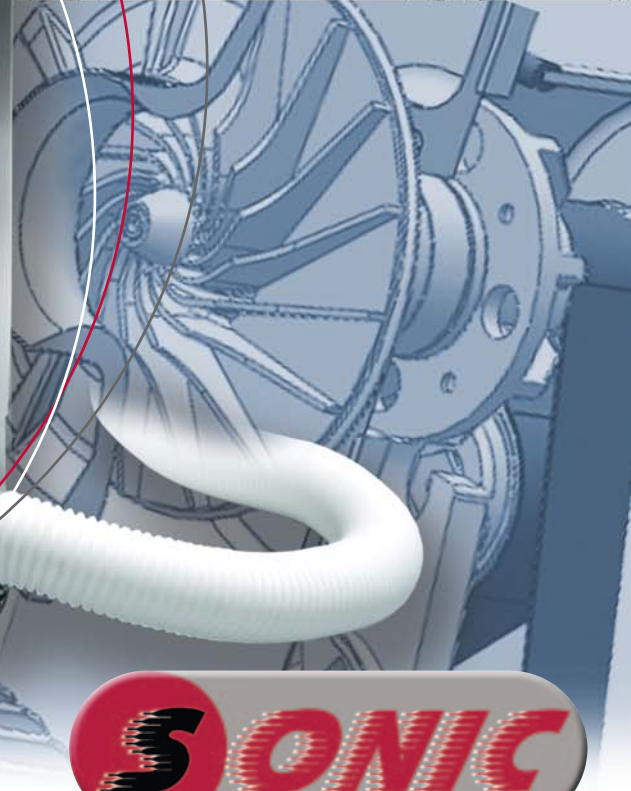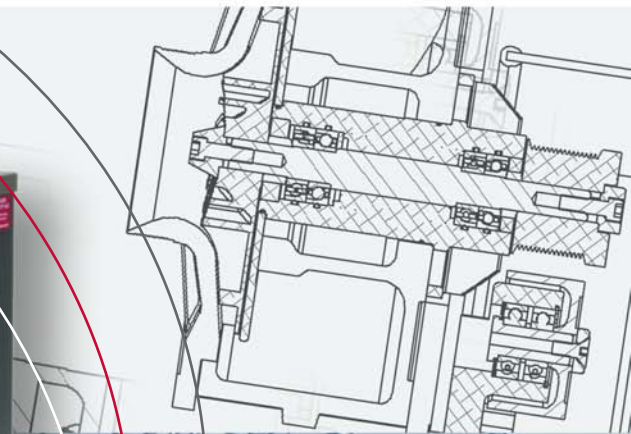

Saving Energy Worldwide.....ONE PSI AT A TIME™

# Efficiency

TECHNOLOGY

versatility

experience

# THE SONIC VT

Tank Dryer


## The Sonic Variable Temperature Air Blower System

The patented Sonic VT (variable temperature) Tank Dryer is the fastest, safest and most energy efficient way to dry any tank, mixer, tote, connecting piping and valves after CIP washing. This true “plug & play” design pumps 160°F of closed circuit blower heat at high air volumes and 1 psig pressure which exchanges the entire volume of the tank circuit up to 5 times per minute in order to force dry every internal surface. Without the use of any secondary heat source (gas, electric or steam), the VT is both simple and safer to operate than any other type of tank drying system.

All too often, blending facilities have no effective drying system in place. A tank, blender, tote and auger conveying system can only be clean after it is dry.


Regardless of whether the CIP cleaning cycle is done manually with handheld spray wands or with automated rotary tank washers, drying is the longest and most labor intensive step. It typically involves a manual blow-out process by an employee using a compressed air wand followed by several hours of evaporative drying before the next product batch can be started. There are many downsides to these outdated drying methods, including lost production time, high labor costs, worker safety issues, redundant tanks, mixers and totes required and bacteria concerns.

The hose from the Sonic VT connects to the tank/mixer circuit as soon as the CIP cycle is complete. Then the operator pushes the starter button, sets the blower pressure valve and walks away. The timer shuts off the blower automatically after the preset 5 to 30 minutes and the next production batch is ready to be started.

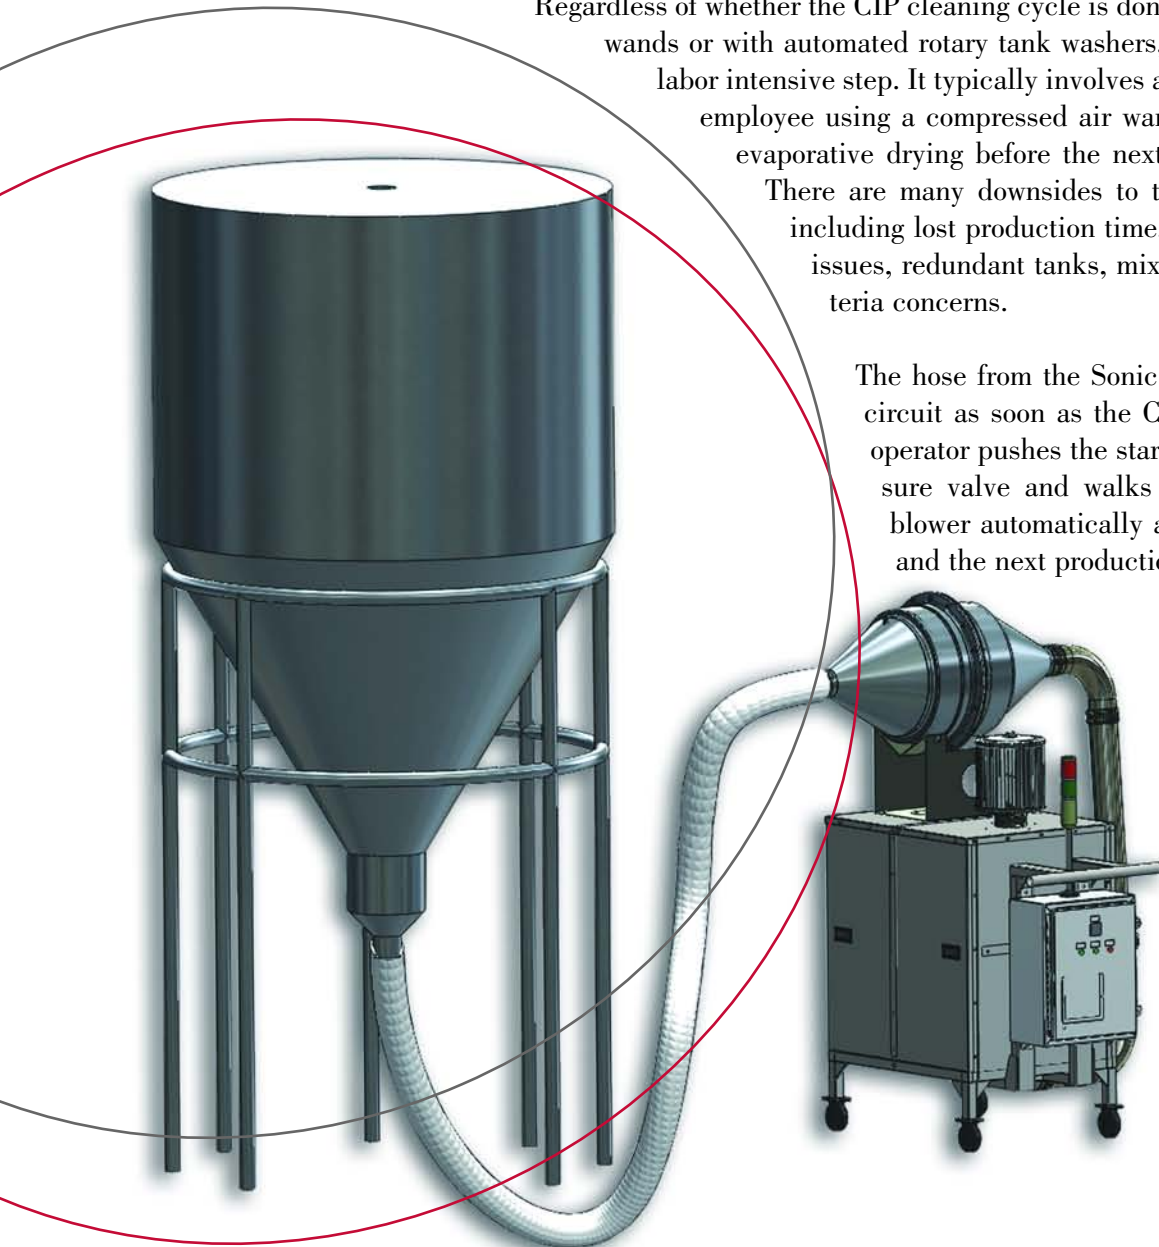

# Sonic VT System Performance

<b>Horsepower</b> (kW)	<b>10</b> (7.5)	<b>15</b> (11)	<b>20</b> (15)	<b>25</b> (18.5)
<b>Max. Circuit Volume Ft<sup>3</sup></b> (tank & blender) (M <sup>3</sup> )	<b>150</b> (4.2)	<b>250</b> (7.0)	<b>400</b> (11.3)	<b>500</b> (14)
<b>Noise Level w/Enclosure</b> dbA at 3 ft (1 meter)	<b>80</b>	<b>80 - 81</b>	<b>81 - 82</b>	<b>81 - 82</b>
<b>Noise Level (blower only)</b> dbA at 3 ft (1 meter)	<b>87</b>	<b>87 - 89</b>	<b>88 - 89</b>	<b>90</b>
<b>Weight blower &amp; enclosure</b> - lbs - kg	<b>390</b> (177)	<b>425</b> (193)	<b>505</b> (229)	<b>545</b> (247)
<b>Dimensions Overall</b> L x W x H - inch - mm	<b>48" x 26" x 58"</b> (1219 x 660 x 1473)			

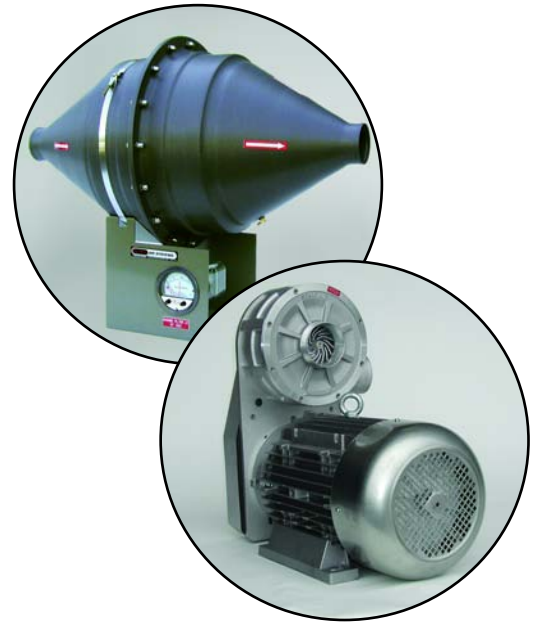


## Features & Benefits

- Patented Heaterless Technology
- Factory preset air temp at 160°F (71°C)
- Clean, dry, oil free air
- Sonic engineers the size to match your drying size
- SS blower enclosure

## Options

- Temperatures to 200°F (93°C)
- HEPA Filter
- Air Temp LED Monitor
- Control panel with light
- Power cord and plug(specify type)
- Tri-clamps and flexhose
- Basic VT blower without enclosure

## Drying Time

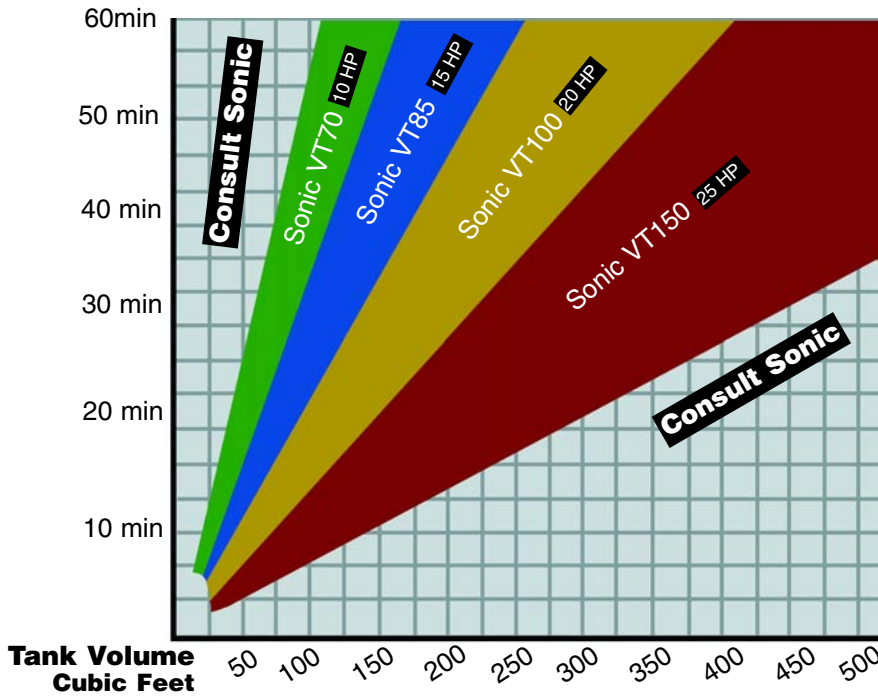

## Sonic COMMITMENT

Sonic Air Systems is committed to serving the communities where we do business, providing our customers with innovative, high-quality products and services and protecting the health of our workers and our environment.

The Sonic VT Tank Dryer models shown in the data above represent the four most common units selected for the total volume of tank circuits listed. The actual model and Hp required for every application are determined by Sonic.



# THE SONIC VT

## Tank Dryer

### Applications

Flavors & Fragrances

Beverage Concentrates

Spices

Nutraceuticals

Pharmaceuticals

Detergents

Cosmetics

Bulks & Powders

Liquids

Sonic Air Systems, Inc.  
1050 Beacon Street  
Brea, California 92821 USA  
800-82-SONIC  
tel +1 714 255 0124  
fax +1 714 255 8366  
asksonic@sonicairsystems.com  
www.sonicairsystems.com



Registered  
to ISO 9001

© 2010 Sonic Air Systems